


BevelScan


Our accurate and rapid measurement tool for pipe end dimensions or bevels with pipe sorting software.

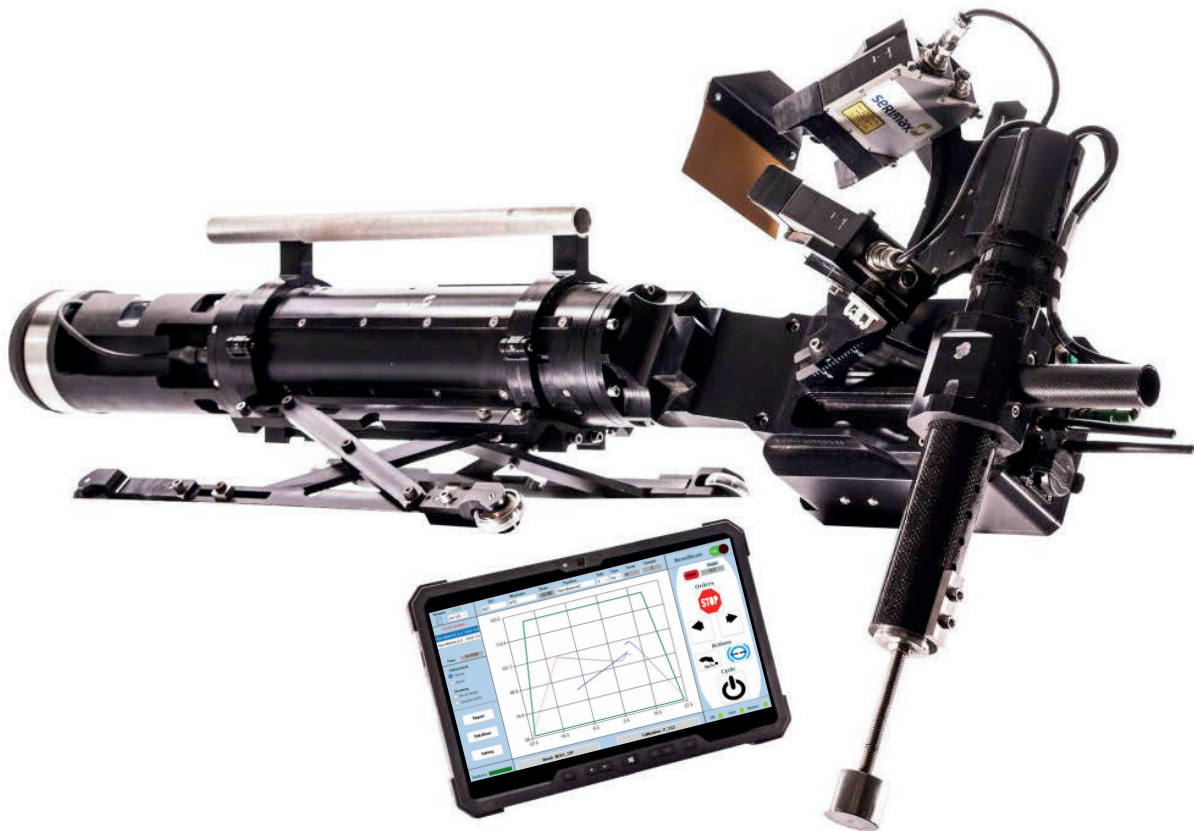

If you are looking for full control of your quality then use BevelScan, this tool will measure your bevels with ease and precision providing you with optimised performance onsite!

- Improve weld quality
- Increase productivity
- Optimise HiLo
- Ensures integrity of welds
- Minimise downtimes

BevelScan

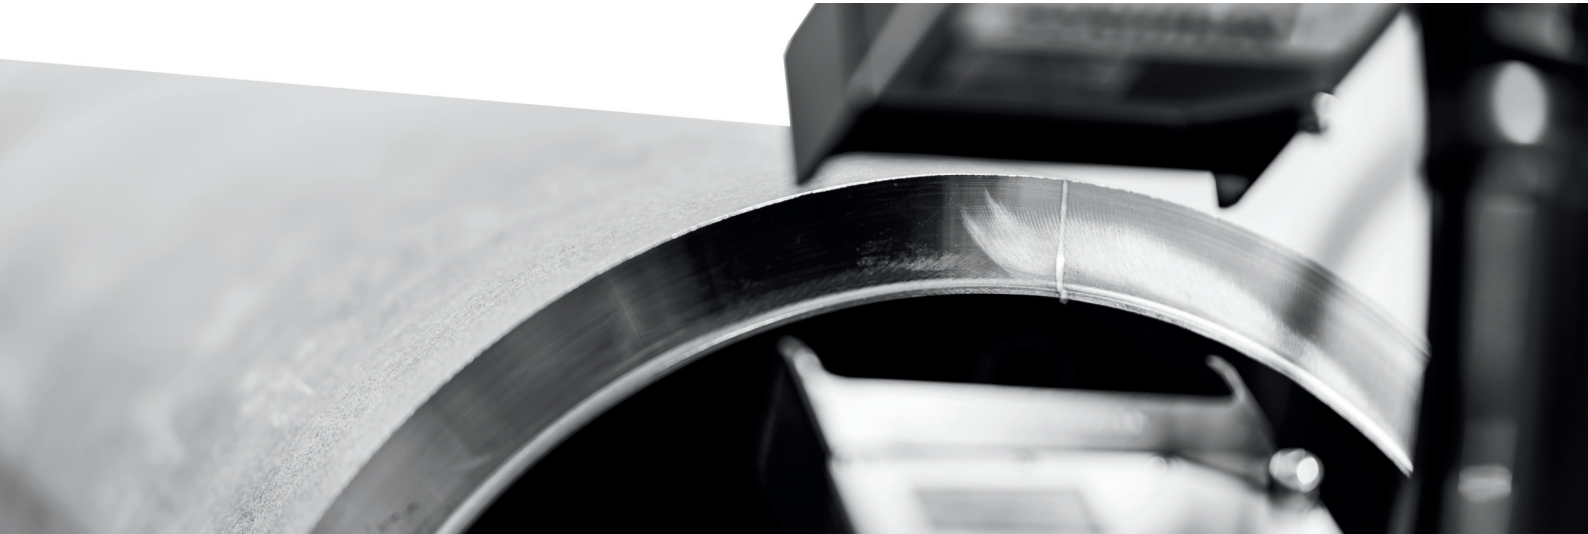

Equipment description range

- Full bevel assessment with Go/
- No Go analysis within 60s (not on the critical path)
- In the following 30s fit-up data available in combination with Cleverscan, a trade-off fit-up can be obtained through best fit features
- Applications : all

Available features

- Special software allows to optimize inner HiLo
- Autonomous power source (battery operated)
- Wireless control
- Portable and easy to use

Operating capabilities

- Diameters: 6" to 36"
- Internal diameter range : 130 – up to 910mm
- Wall thickness range : 6 - 50mm (Beyond 50mm please contact Serimax)

Analysis and reporting

- Integrated software for linking between data acquisition and analysis phases
- Fully integrated with CleverWeld data traceability and reporting system

